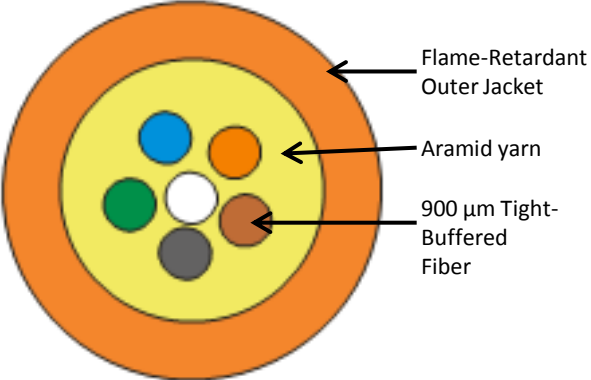
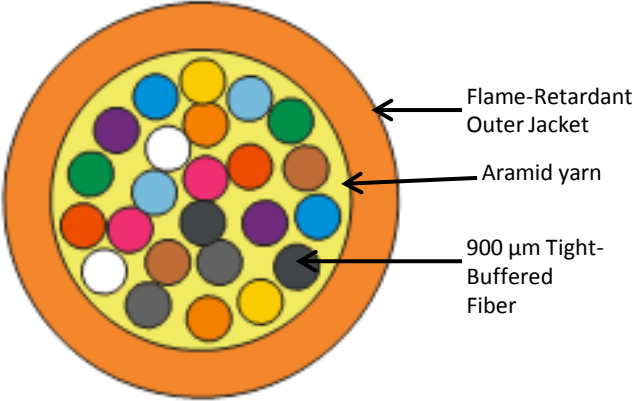


Category	Fiber Optic Cables
Specification	Distribution Cable
Parameters	<p>Available Fiber Count : 4 / 6 / 8 / 12 / 24 / 48 / 72 / 96 / 144</p> <p>Available Fiber Mode :</p> <ul style="list-style-type: none"> • Singlemode (OS 1/2) • Multimode (OM1, OM2, OM3, OM4) <p>Fiber Characteristic :</p> <ul style="list-style-type: none"> • Primary Coating : 250 μm (245 +/- 10 μm) • Buffered Layer : 900 μm (870 +/- 50 μm) • Buffer Color : 12-color compliant to TIA-598 <p>Jacket Material :</p> <ul style="list-style-type: none"> • Riser (OFNR) • Low Smoke Zero Halogen (LSZH) • Plenum (OFNP) <p>Outer Jacket Color :</p> <ul style="list-style-type: none"> • Singlemode (OS1/2) : Yellow • Multimode (OM1,OM2) : Orange • Multimode (OM3,OM4) : Aqua <p>Temperature Range :</p> <ul style="list-style-type: none"> • Storage or transportation : - 20 °C to + 70 °C • Operation : - 20 °C to + 70 °C <p style="text-align: right;">(Please turn to next Page)</p>



Specifications are subject to change without notice.

Category	Fiber Optic Cables																																																																																																																																			
Specification	Distribution Cable																																																																																																																																			
Parameters	Key Performance : For 4F / 6F / 8F/ 12F / 24F / 48F : <table border="1" data-bbox="368 417 1239 1023"> <thead> <tr> <th colspan="2" rowspan="2">Fiber Count</th> <th>4</th> <th>6</th> <th>8</th> <th>12</th> <th>24</th> <th>48</th> </tr> <tr> <th colspan="6">Parameters</th> </tr> </thead> <tbody> <tr> <td colspan="2">Outer Diameter (mm)</td> <td>4.8 ±0.2</td> <td>5.2 ±0.2</td> <td>6.2 ±0.2</td> <td>6.8 ±0.3</td> <td>8.4 ±0.5</td> <td>12.5 ±0.5</td> </tr> <tr> <td colspan="2">Nominal Weight (kg / km)</td> <td>18</td> <td>23</td> <td>29</td> <td>37</td> <td>61</td> <td>132</td> </tr> <tr> <td rowspan="2">Max. Tension (N)</td> <td>Short-term</td> <td>270</td> <td>330</td> <td>480</td> <td>600</td> <td>720</td> <td>1200</td> </tr> <tr> <td>Long-term</td> <td>90</td> <td>110</td> <td>160</td> <td>200</td> <td>240</td> <td>520</td> </tr> <tr> <td rowspan="2">Max. Crushing Resistance (N / 100)</td> <td>Short-term</td> <td>1000</td> <td>1000</td> <td>1000</td> <td>1000</td> <td>1000</td> <td>1000</td> </tr> <tr> <td>Long-term</td> <td>300</td> <td>300</td> <td>300</td> <td>300</td> <td>300</td> <td>300</td> </tr> <tr> <td rowspan="2">Min. Bending Radius (mm)</td> <td>Dynamic</td> <td>20D</td> <td>20D</td> <td>20D</td> <td>20D</td> <td>20D</td> <td>20D</td> </tr> <tr> <td>Static</td> <td>10D</td> <td>10D</td> <td>10D</td> <td>10D</td> <td>10D</td> <td>10D</td> </tr> </tbody> </table> For 72F / 96F / 144F : <table border="1" data-bbox="374 1116 1230 1773"> <thead> <tr> <th colspan="2" rowspan="2">Fiber Count</th> <th>72</th> <th>96</th> <th>144</th> </tr> <tr> <th colspan="3">Parameters</th> </tr> </thead> <tbody> <tr> <td colspan="2">No. of Sub-unit</td> <td>6</td> <td>8</td> <td>12</td> </tr> <tr> <td colspan="2">Outer Diameter (mm)</td> <td>21.0 ±0.8</td> <td>25.8 ±0.8</td> <td>28.2 ±0.8</td> </tr> <tr> <td colspan="2">Nominal Weight (kg / km)</td> <td>328</td> <td>500</td> <td>678</td> </tr> <tr> <td rowspan="2">Max. Tension (N)</td> <td>Short-term</td> <td>2500</td> <td>3000</td> <td>4000</td> </tr> <tr> <td>Long-term</td> <td>1000</td> <td>1200</td> <td>1600</td> </tr> <tr> <td rowspan="2">Max. Crushing Resistance (N / 100)</td> <td>Short-term</td> <td>1000</td> <td>1000</td> <td>1000</td> </tr> <tr> <td>Long-term</td> <td>300</td> <td>300</td> <td>300</td> </tr> <tr> <td rowspan="2">Min. Bending Radius (mm)</td> <td>Dynamic</td> <td>20D</td> <td>20D</td> <td>20D</td> </tr> <tr> <td>Static</td> <td>10D</td> <td>10D</td> <td>10D</td> </tr> </tbody> </table>							Fiber Count		4	6	8	12	24	48	Parameters						Outer Diameter (mm)		4.8 ±0.2	5.2 ±0.2	6.2 ±0.2	6.8 ±0.3	8.4 ±0.5	12.5 ±0.5	Nominal Weight (kg / km)		18	23	29	37	61	132	Max. Tension (N)	Short-term	270	330	480	600	720	1200	Long-term	90	110	160	200	240	520	Max. Crushing Resistance (N / 100)	Short-term	1000	1000	1000	1000	1000	1000	Long-term	300	300	300	300	300	300	Min. Bending Radius (mm)	Dynamic	20D	20D	20D	20D	20D	20D	Static	10D	10D	10D	10D	10D	10D	Fiber Count		72	96	144	Parameters			No. of Sub-unit		6	8	12	Outer Diameter (mm)		21.0 ±0.8	25.8 ±0.8	28.2 ±0.8	Nominal Weight (kg / km)		328	500	678	Max. Tension (N)	Short-term	2500	3000	4000	Long-term	1000	1200	1600	Max. Crushing Resistance (N / 100)	Short-term	1000	1000	1000	Long-term	300	300	300	Min. Bending Radius (mm)	Dynamic	20D	20D	20D	Static	10D	10D	10D
Fiber Count		4	6	8	12	24	48																																																																																																																													
		Parameters																																																																																																																																		
Outer Diameter (mm)		4.8 ±0.2	5.2 ±0.2	6.2 ±0.2	6.8 ±0.3	8.4 ±0.5	12.5 ±0.5																																																																																																																													
Nominal Weight (kg / km)		18	23	29	37	61	132																																																																																																																													
Max. Tension (N)	Short-term	270	330	480	600	720	1200																																																																																																																													
	Long-term	90	110	160	200	240	520																																																																																																																													
Max. Crushing Resistance (N / 100)	Short-term	1000	1000	1000	1000	1000	1000																																																																																																																													
	Long-term	300	300	300	300	300	300																																																																																																																													
Min. Bending Radius (mm)	Dynamic	20D	20D	20D	20D	20D	20D																																																																																																																													
	Static	10D	10D	10D	10D	10D	10D																																																																																																																													
Fiber Count		72	96	144																																																																																																																																
		Parameters																																																																																																																																		
No. of Sub-unit		6	8	12																																																																																																																																
Outer Diameter (mm)		21.0 ±0.8	25.8 ±0.8	28.2 ±0.8																																																																																																																																
Nominal Weight (kg / km)		328	500	678																																																																																																																																
Max. Tension (N)	Short-term	2500	3000	4000																																																																																																																																
	Long-term	1000	1200	1600																																																																																																																																
Max. Crushing Resistance (N / 100)	Short-term	1000	1000	1000																																																																																																																																
	Long-term	300	300	300																																																																																																																																
Min. Bending Radius (mm)	Dynamic	20D	20D	20D																																																																																																																																
	Static	10D	10D	10D																																																																																																																																

Specifications are subject to change without notice.

Category	Fiber Optic Cables
Specification	Distribution Cable
<p>Parameters</p>	<p>Cable Cross Section Diagrams : 4 / 6 / 8 / 12 / 24 / 48– Fiber with one outer jacket</p> <div style="text-align: center;">  <p>6-Fiber Distribution Cable</p> </div> <div style="text-align: center;">  <p>24-Fiber Distribution Cable</p> </div>

Specifications are subject to change without notice.

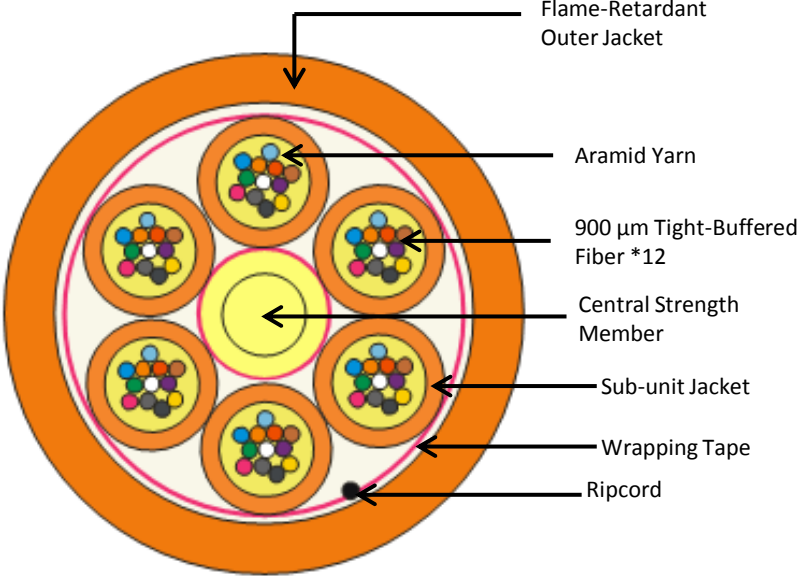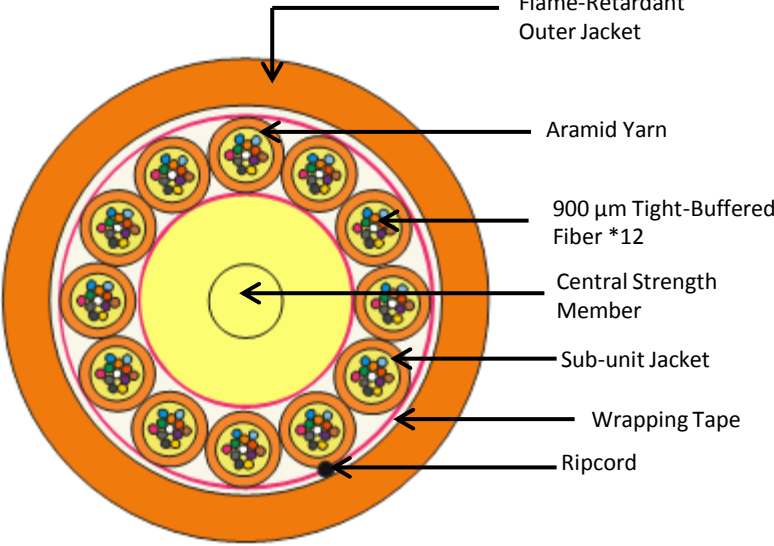Category	Fiber Optic Cables
Specification	Distribution Cable
Parameters	<p>Cable Cross Section Diagrams : 72 / 96 / 144 –Fiber with 6 / 8 / 12 Sub-unit Jacket and One Outer Jacket</p>  <p style="text-align: center;">72-Fiber Distribution Cable</p>  <p style="text-align: center;">144-Fiber Distribution Cable</p>

Specifications are subject to change without notice.