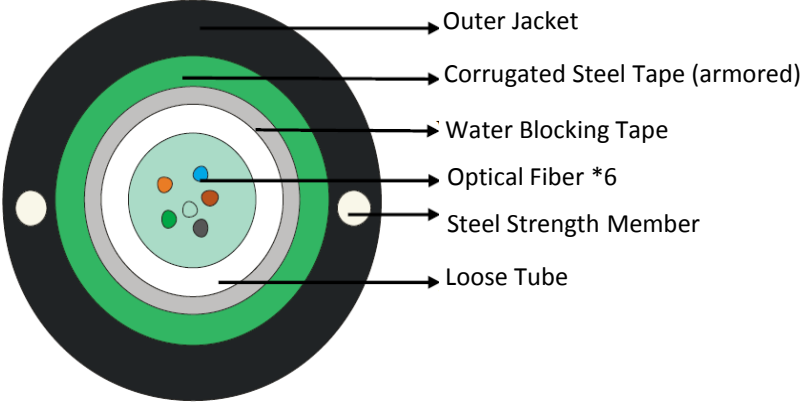


Category	Fiber Optic Cables																																		
Specification	Steel Armored Cable																																		
Parameters	<p>Fiber Count options : 2 / 4 / 6 / 8 / 12 / 24</p> <p>Available Fiber Mode :</p> <ul style="list-style-type: none"> • Singlemode (OS1/2) • Multimode (OM1, OM2, OM3, OM4) <p>Jacket Material Options :</p> <ul style="list-style-type: none"> • PE • Low Smoke Zero Halogen (LSZH) <p>Material of Strength Member : Steel</p> <p>Temperature Range :</p> <ul style="list-style-type: none"> • Storage or transportation : - 40 °C to + 70 °C • Operation : - 40 °C to + 70 °C <p>Key Performance :</p> <table border="1"> <thead> <tr> <th colspan="2" rowspan="2">Parameters</th> <th colspan="2">Fiber Count</th> </tr> <tr> <th>2 - 12</th> <th>24</th> </tr> </thead> <tbody> <tr> <td colspan="2">Outer Diameter (mm)</td> <td>8.0±0.3</td> <td>8.8±0.3</td> </tr> <tr> <td colspan="2">No. of Tube per Cable</td> <td>1</td> <td>1</td> </tr> <tr> <td colspan="2">Nominal Weight (kg / km)</td> <td>85 (LSZH Jacket) 62 (PE Jacket)</td> <td>105 (LSZH Jacket) 74 (PE Jacket)</td> </tr> <tr> <td rowspan="2">Max. Tension (N)</td> <td>Short-term</td> <td>1500</td> <td>1500</td> </tr> <tr> <td>Long-term</td> <td>500</td> <td>500</td> </tr> <tr> <td rowspan="2">Max. Crushing Resistance (N / 100)</td> <td>Short-term</td> <td>3000</td> <td>3000</td> </tr> <tr> <td>Long-term</td> <td>1000</td> <td>1000</td> </tr> </tbody> </table>			Parameters		Fiber Count		2 - 12	24	Outer Diameter (mm)		8.0±0.3	8.8±0.3	No. of Tube per Cable		1	1	Nominal Weight (kg / km)		85 (LSZH Jacket) 62 (PE Jacket)	105 (LSZH Jacket) 74 (PE Jacket)	Max. Tension (N)	Short-term	1500	1500	Long-term	500	500	Max. Crushing Resistance (N / 100)	Short-term	3000	3000	Long-term	1000	1000
Parameters		Fiber Count																																	
		2 - 12	24																																
Outer Diameter (mm)		8.0±0.3	8.8±0.3																																
No. of Tube per Cable		1	1																																
Nominal Weight (kg / km)		85 (LSZH Jacket) 62 (PE Jacket)	105 (LSZH Jacket) 74 (PE Jacket)																																
Max. Tension (N)	Short-term	1500	1500																																
	Long-term	500	500																																
Max. Crushing Resistance (N / 100)	Short-term	3000	3000																																
	Long-term	1000	1000																																

Specifications are subject to change without notice.

Category	Fiber Optic Cables
Specification	Steel Armored Cable
Parameters	<p>Cable Cross Section Diagrams :</p>  <p>6-Fiber Steel Armored Cable</p>

Specifications are subject to change without notice.