

D200 - 1U ENCLOSURE FOR SPLICING/ PATCHING

200mm depth rack-mountable enclosure in 1U design for the installation environment where tight space constraints exists.

Available for both splicing and patching application and compatible with 19" EIA standard cabinets and rack system.

The enclosure is designed with a pull-out tray that preloaded with specified adapters on the front panel, offered in 24- or 48-Fiber with splicing/patching accessories, and customer specified adapter type.



KEY FEATURES :


- Slim design with 200mm depth, especially suitable for tight space environment
- Pull-out tray preloaded with customer specified adapters on front panel
- Available for patching or splicing options
- Choices of FC, SC, ST or LC adapters with different fiber modes
- Preloaded with adjustable rackmount ears
- Economical and easy to handle

Specifications

Main Material	Standard offer : Steel Option of Aluminium on request
Dimension Height (U) x Width (W) x Depth (D)	1U x 435mm x 200mm
Available Interfaces	FC, SC, ST, LC
Available Fiber Modes	Singlemode (OS 1/2) Multimode (OM1, OM2, OM3, OM4)
Color & Coating	Black Powder Coating
Compliance	RoHS, EIA-310
Preloaded Units	Pull-out Tray Preloaded with Specified Adapters Splicing Kits (For Splicing Enclosure Only) Cable Management Spools Adjustable Rackmount Ears, 70mm from the front plate (x 2pcs)

D200 - 1U ENCLOSURE FOR SPLICING/ PATCHING


FOR SPLICING USE

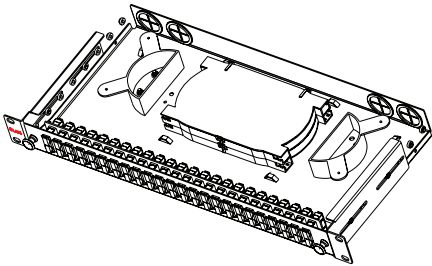

Example of D200,
SC, 48-Fiber, Splicing, OM3
P/N: R200S1G-2CM3

Item Description			Part No.	
Adapter Interface	Fiber Mode	Adapter Color	24-Fiber Option	48-Fiber Option
FC	OS1/OS2	Metallic	R200S1G-1BSU	R200S1G-1CSU
	OM1	Metallic	R200S1G-1BM1	R200S1G-1CM1
	OM2	Metallic	R200S1G-1BM2	R200S1G-1CM2
SC	OS1/OS2 (APC)	Green	N/A	R200S1G-2CSA
	OS1/OS2	Blue	N/A	R200S1G-2CSU
	OM1	Beige	N/A	R200S1G-2CM1
	OM2	Beige	N/A	R200S1G-2CM2
	OM3	Aqua	N/A	R200S1G-2CM3
ST	OS1/OS2	Metallic	R200S1G-3BSU	R200S1G-3CSU
	OM1	Metallic	R200S1G-3BM1	R200S1G-3CM1
	OM2	Metallic	R200S1G-3BM2	R200S1G-3CM2
LC	OS1/OS2 (APC)	Green	N/A	R200S1G-4CSA
	OS1/OS2	Blue	N/A	R200S1G-4CSU
	OM1	Beige	N/A	R200S1G-4CM1
	OM2	Beige	N/A	R200S1G-4CM2
	OM3	Aqua	N/A	R200S1G-4CM3
	OM4	Aqua	N/A	R200S1G-4CM4

FOR PATCHING USE

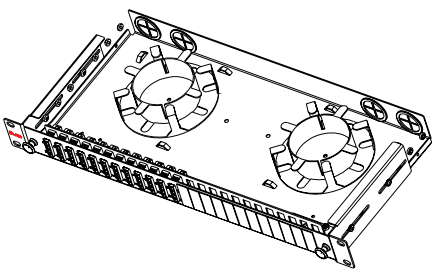

Example of D200,
LC, 48-Fiber, Patching, OM2
P/N: R200P1G-4CM2

Item Description			Part No.	
Adapter Interface	Fiber Mode	Adapter Color	24-Fiber Option	48-Fiber Option
FC	OS1/OS2	Metallic	R200P1G-1BSU	R200P1G-1CSU
	OM1	Metallic	R200P1G-1BM1	R200P1G-1CM1
	OM2	Metallic	R200P1G-1BM2	R200P1G-1CM2
SC	OS1/OS2 (APC)	Green	N/A	R200P1G-2CSA
	OS1/OS2	Blue	N/A	R200P1G-2CSU
	OM1	Beige	N/A	R200P1G-2CM1
	OM2	Beige	N/A	R200P1G-2CM2
	OM3	Aqua	N/A	R200P1G-2CM3
ST	OS1/OS2	Metallic	R200P1G-3BSU	R200P1G-3CSU
	OM1	Metallic	R200P1G-3BM1	R200P1G-3CM1
	OM2	Metallic	R200P1G-3BM2	R200P1G-3CM2
LC	OS1/OS2 (APC)	Green	N/A	R200P1G-4CSA
	OS1/OS2	Blue	N/A	R200P1G-4CSU
	OM1	Beige	N/A	R200P1G-4CM1
	OM2	Beige	N/A	R200P1G-4CM2
	OM3	Aqua	N/A	R200P1G-4CM3
	OM4	Aqua	N/A	R200P1G-4CM4