

# RACKMOUNT ADAPTER FACEPLATES

Adapter Faceplates compatible with Olabs Rackmount Enclosures.

Easily snap-in design with 3 sizes options and different choices of adapter interfaces.


## KEY FEATURES :

- Easily snap into Olabs rackmount enclosures
- Comprehensive range of adapter types to fit for each installation needs
- Choices of FC, SC, ST, LC or MPO with singlemode or multimode
- Interchangeable for Drawer Type or Fixed Type enclosure

## Specifications


<b>Main Material</b>	Aluminum				
<b>Dimension</b>	Size A : 32mm x 155mm				
<b>Height (H) x Width (W)</b>	Size B : 32mm x 120mm				
	Size E : 32mm x 102mm (for MPO only)				
<b>Snap Distance</b>	Size A : 145 mm				
	Size B : 108 mm				
	Size E : 92 mm (for MPO only)				
<b>Available Interfaces</b>	FC, SC, ST, LC, MPO				
<b>Available Fiber Modes</b>	Singlemode (OS 1/2)				
	Multimode (OM1, OM2, OM3, OM4)				
<b>Color &amp; Coating</b>	Black Powder Coating				
<b>Compliance</b>	RoHS				
<b>Preloaded Units</b>	Fiber Optic Adapters				
	Silk-printed channel numbering marks				
<b>Size Options</b>	FC	SC	ST	LC	MPO
Size A :	✓	✓	✓	✓	
Size B :	✓	✓	✓	✓	✓
Size E :					✓

**Size-A Faceplate: 32(H) x 150(W)mm**

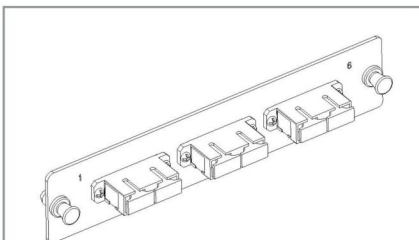


Used to house into 2-slot Rackmount Panels for Splicing/Patching.

**Size-B Faceplate: 32(H) x 120(W)mm**

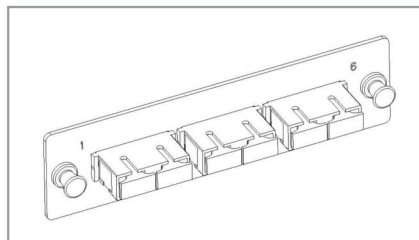


Used to house into 3-slot Rackmount Panels for Splicing/Patching.

**Size-E Faceplate: 32(H) x 102(W)mm (MPO only)**

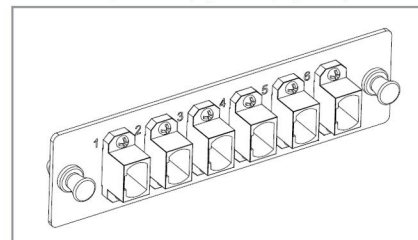

Used to house into 4-slot Drawer (M4B Drawer) or 12-slot 4U Fixed Type-B PPM enclosure.

# RACKMOUNT ADAPTER FACEPLATES

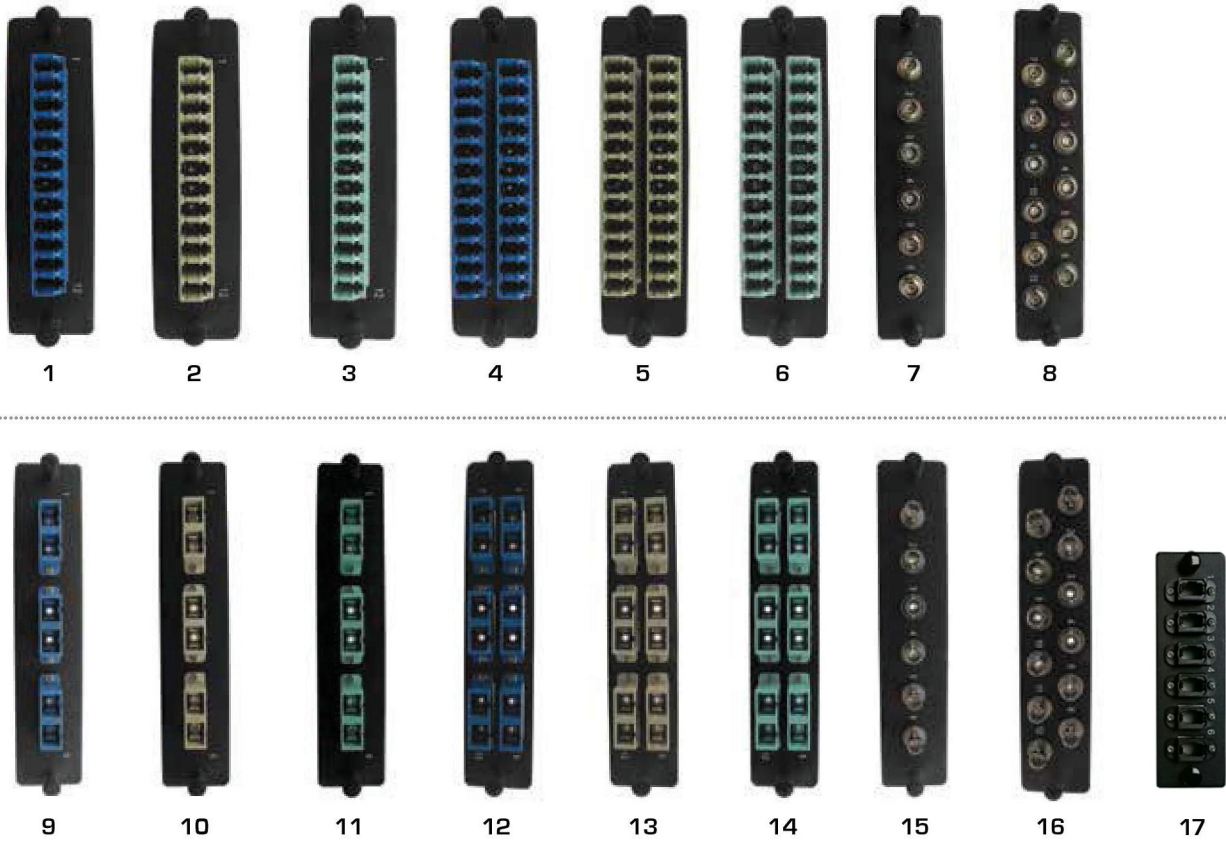

## LC FACEPLATE

Item Description				Part No. for 2 Sizes	
Item	No. of Fiber Per Faceplate	Adapter Color	Fiber Mode	Size-A: 32(H) x 155(H)mm	Size-B: 32(H) x 120(W)mm
1	12	Green	OS1/2 (APC)	A412G	B412G
	12	Blue	OS1/2	A412B	B412B
2	12	Beige	OM1, OM2	A412R	B412R
3	12	Aqua	OM3, OM4	A412A	B412A
4	24	Green	OS1/2 (APC)	A424G	B424G
	24	Blue	OS1/2	A424B	B424B
5	24	Beige	OM1, OM	A424R	B424R
6	24	Aqua	OM3, OM4	A424A	B424A

# RACKMOUNT ADAPTER FACEPLATES

## FC FACEPLATE

Item Description				Part No. for 2 Sizes	
Item	No. of Fiber Per Faceplate	Adapter Color	Fiber Mode	Size-A: 32(H) x 155(H)mm	Size-B: 32(H) x 120(W)mm
7	6	Metallic	Suitable for all modes	A106N	B106N
8	12	Metallic	Suitable for all modes	A112N	N/A

## SC FACEPLATE

Item Description				Part No. for 2 Sizes	
Item	No. of Fiber Per Faceplate	Adapter Color	Fiber Mode	Size-A: 32(H) x 155(H)mm	Size-B: 32(H) x 120(W)mm
9	6	Green	OS1/2 (APC)	A206G	B206G
	6	Blue	OS1/2	A206B	B206B
10	6	Beige	OM1, OM2	A206R	B206R
11	6	Aqua	OM3, OM4	A206A	B206A
12	12	Green	OS1/2 (APC)	A212G	B212G
	12	Blue	OS1/2	A212B	B212B
13	12	Beige	OM1, OM2	A212R	B212R
14	12	Aqua	OM3, OM4	A212A	B212A

## ST FACEPLATE

Item Description				Part No. for 2 Sizes	
Item	No. of Fiber Per Faceplate	Adapter Color	Fiber Mode	Size-A: 32(H) x 155(H)mm	Size-B: 32(H) x 120(W)mm
15	6	Metallic	Suitable for all modes	A306N	B306N
16	12	Metallic	Suitable for all modes	A312N	N/A

## MPO FACEPLATE

Item Description				Part No. for 2 Sizes	
Item	No. of Port Per Faceplate	Adapter Color	Adapter Orientation	Size-B: 32(H) x 120(W)mm	Size-E: 32(H) x 102(W)mm
17	6	Black	Key up to Key down	B66PK	E66PK
	6	Black	Key up to Key up	B66PL	E66PL

\* If MPO (APC) singlemode connector is used, MPO adapter with Key up to Key down should be selected for correct alignment.